

# C-PACK

## VAC 984

# C-PACK

## VAC 984



#### Technical data:

**Performance:**  
max. 40 packages/min, depending on product and infeed system

**Power supply:**  
400/230 Volt N/PE, 50/60 Hz, approx. 2.0 kW (other connections on request)

**Machine weight:**  
approx. 500 kg

**Package weights:**  
0.5 – 1,5 kg (depending on size of product)

**Labelling:**  
Optional wineglas and clip2clip

**Clipping strip:**  
thickness: 0.35 – 0.45 mm width : 5 mm

**Required Net Material:**  
Woven or extruded

**net tube dimensions:**  
standard 200 mm, others on request

**Infeed height:**  
760 - 880 mm

#### Standard equipment:

- Automatic Tube Change
- adjustable net length
- Touchscreen Display
- automatic Clip head lubrication
- fast unlock system of clip head
- inside illumination
- 48 mm K6 Clip head
- net transport by net transport rollers

#### Options:

- label transporting units
- printers
- exit conveyors



**C-PACK**  
Verpackungsmaschinen GmbH  
Kleiner Moorweg 34  
25436 Tornesch - Germany


Tel: +49-4122-51173  
Fax: +49-4122-55647  
e-mail: c-pack@c-pack.com  
Internet: www.c-pack.com

**C-PACK**  
Verpackungsmaschinen GmbH  
Kleiner Moorweg 34  
25436 Tornesch - Germany

Tel: +49-4122-51173  
Fax: +49-4122-55647  
e-mail: c-pack@c-pack.com  
Internet: www.c-pack.com

# C-PACK

## VAC 984

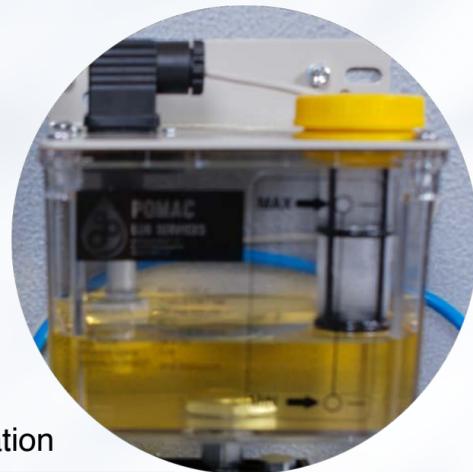

automatic lubrication



touchscreen

